

# Masking tape


# 104

## Feature

- Because it is a waterborne adhesive, it is environmentally friendly.
- Good lacquer property
- Adhesive residue on adherend (excellent in non-contaminating property) None.

**Use** ● Building materials use

## Constitution

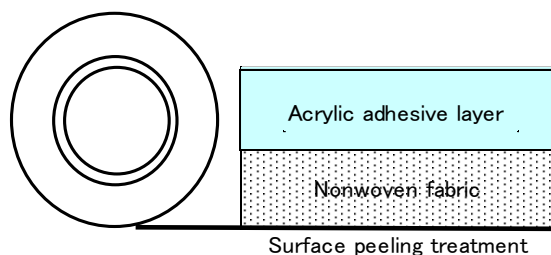

## Characteristic

### Basic characteristics

item	unit	
Base material	Special nonwoven fabric	
Base color	yellow	
Tape thickness	mm	0.1
Adhesive force	N/18mm	7N $\geq$
Ball Tack	Spherical point method	14~17
Tensile strength	N/10mm	30 $\leq$

### Precautions on use

- All technical data are prepared based on tests and measured values conducted at the laboratory of Joint Giken Kagaku Co., Ltd. However, product characteristics may vary greatly depending on environment and adherend. Therefore, regarding these characteristic data, it is a reference value, not a guaranteed value. Before using it please make sure that this product is suitable for the intended use and environment.
- The above measurement is performed at room temperature (23 ° C). In case of low temperature (5 °C or less), adhesion may decrease sharply.

### Caution on storage

- Please be sure to put it in a box and keep it.
- Please choose a cold and dark place not to be exposed to direct sunlight for the storage location.

In particular, please do not expose to high temperature and high humidity (temperature 30 °C or more and humidity 50% or more forbidden).

Kyoudo giken kagaku co.,ltd  
〒359-0011

940 Minami-nagai tokorozawa city  
saitama pref. JAPAN  
TEL +81-4-2944-5151