



KGK Chemical Corp.

#1 Coating Technology in The World
Molecule Gradient Layer (MGL)TM Technology

Conductive adhesive tape

One side conductive nonwoven fabric matrix conductive adhesive tape

101C


Features

It is the adhesive tape which applied an acrylic system adhesive to a conductive nonwoven fabric
With a special conductive adhesive, I am superior in the initial adhesive strength.

Use

The electrostatic removal and ground collecting
Diselectrification use

Structure

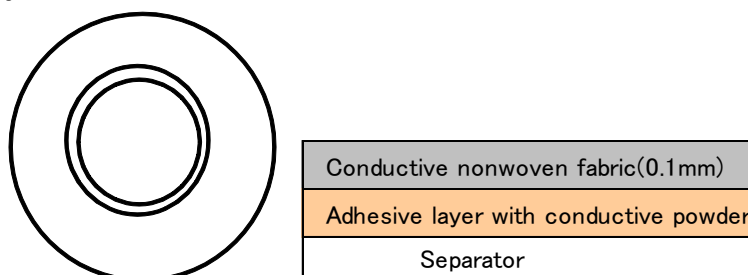

Properties

Item	Unit	Measurements
Support thickness	mm	0.10
Tape thickness	mm	0.11
Peeling Strength	N/25mm	10.9
Tensile strength	N/25mm	243
volume resistivity value	$\Omega \cdot \text{cm}$	0.12

User is responsible for determining whether the KGK product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of a KGK product in a particular application. The materials to be bonded with the product, the surface preparation of those materials, the product selected for use, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a KGK product. Given the variety of factors that can affect the use and performance of a KGK product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the KGK product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

KGK make no warranties on above data.

KGK Chemical Corporation.

940 Minaminagai Tokorozawa-City saitama-Pref
359-0011 Japan

Tel : +81 4 2944 5151

Mail : info-k@kgk-tape.co.jp

URL : <https://www.kgk-tape.co.jp/>

issue: 2019/10