



#1 Coating Technology in The World
Molecule Gradient Layer (MGL)TM Technology

High processable and high adhesion double-coated adhesive tape

The nonwoven carried
super thin double-coated tape

205ER


Features

- "205ER" has high processable performance based nonwoven.
- "205ER" has superior adhesion to various adherends for plastics and metal
- "205ER" is re-peelable, strong adhesive double-coated tape.
- VOCSolvent-free: not use solvent of the guideline for indoor air concentrations

Application

- For fixing cushioning or sealing material for electronics parts.
- For fixing LCD-modules
- For fixing key-sheets
- For fixing name-plate

Construction

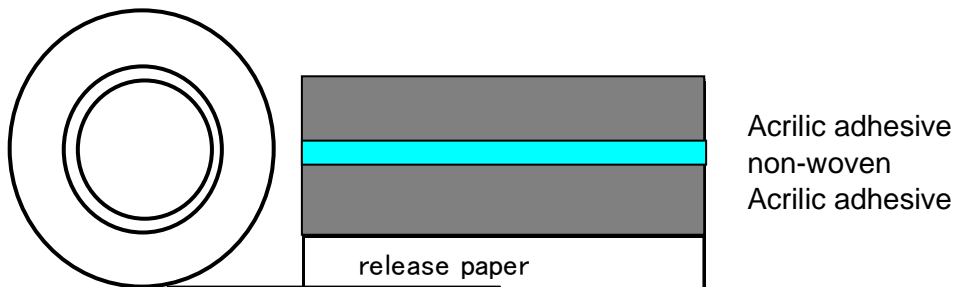


Properties

Product name	Thickness (mm)	Adhesive strength (N/25mm)
205ER	0.14	15

※Measurement conditions: PET#25 backing, peeling speed 300mm/min, 180° angle.
※The above values are sample observed values, not the guaranteed performance.

Thermal properties

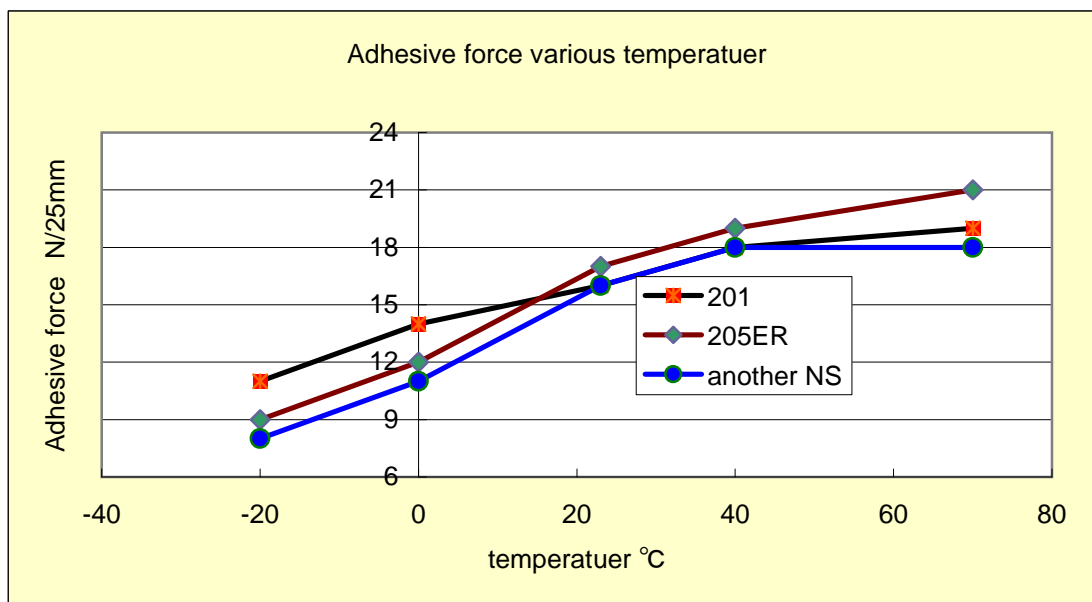

Notice

- The above values are sample observed values, not the guaranteed performance.

User is responsible for determining whether the KGK product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of a KGK product in a particular application. The materials to be bonded with the product, the surface preparation of those materials, the product selected for use, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a KGK product. Given the variety of factors that can affect the use and performance of a KGK product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the KGK product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

KGK make no warranties on above data.

Issue Nov 2013

Kyodo giken chemical co.,Ltd
Postal code/ 359-0011
940 Minami-nagai Tokorozawa city
Saitama pref. JAPAN
phone +81-4-2944-5151