



## #1 Coating Technology in The World Molecule Gradient Layer (MGL)<sup>TM</sup> Technology

Super high adhesion double-coated adhesive tape

The foam carriered double-coated tape

# 2400


### Features

- ①High performance bouble coated tape by foam substrated.
- ②Superior adhesion to various adherends for plastics and metal
- ③Have heat resistant properties.

### Application

- Fixing of small household goods such as nameplates and simple hooks
- For fixing cushioning or sealing material for electronics parts.
- Fixing of outside parts of automobile.

### Structure

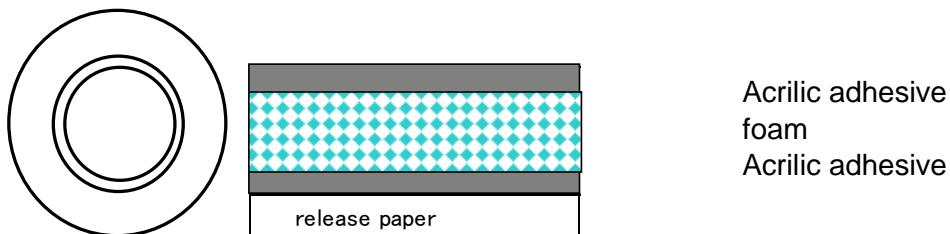

### Properties

製品名 product name	色 color	厚み Thickness (mm)	粘着力 Adhesive force (N/25mm)
2400	white	0.75	25

※Measurement conditions: PET#25 backing, peeling speed 300mm/min, 180° angle.

※The above values are sample observed values, not the guaranteed performance.

## Notice

- The above values are sample observed values, not the guaranteed performance.

User is responsible for determining whether the KGK product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of a KGK product in a particular application. The materials to be bonded with the product, the surface preparation of those materials, the product selected for use, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a KGK product. Given the variety of factors that can affect the use and performance of a KGK product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the KGK product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

KGK make no warranties on above data.

Issue Sep-2013

Kyodo giken chemical co.,ltd  
〒359-0011  
940 Minami-nagai Tokorozawa  
city