

Waterproof airtight tape for residential building materials

Cut cross HB pink

Feature

- Cut cloth uses pressure sensitive adhesive excellent in durability and weather resistance, Its performance will be maintained for a long time.
- Substrate to be used is base material with excellent strength and hand-cut property. Since it has excellent adhesiveness to various adherends and has adequate fluidity in the adhesive layer, It also strongly adheres to rough surfaces.
- Excellent adhesive performance even at low temperature.
- It is an approved product as a recommended item of NYG Association.
- Toluene not used


Use

- As around the sashes, around the floor, openings, joints such as the foundation and foundation waterproof, waterproof airtight.
- Breathable waterproof sheet connection, as a waterproof application.
- 2 × 4 panel, connection of insulation material, as a waterproof application.

構造

Cut cross HB

Base material color (pink)

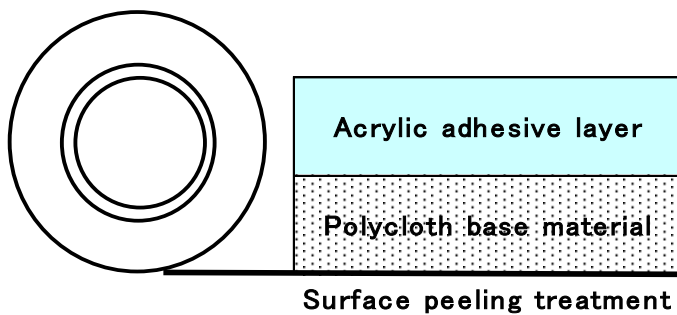


Characteristic

Basic characteristics

		Item name	
		HB	
item	unit	Single-sided adhesive	
Base material		Polycloth	
Base color		pink	
Tape thickness	mm	0.2	
	Adherend		
Initial adhesion	SUS	N/25mm	28
Normal state adhesive	SUS	N/25mm	30

adhesive	PE	N/25mm	25
	Veneer	N/25mm	28
Holding power	SUS	mm	2

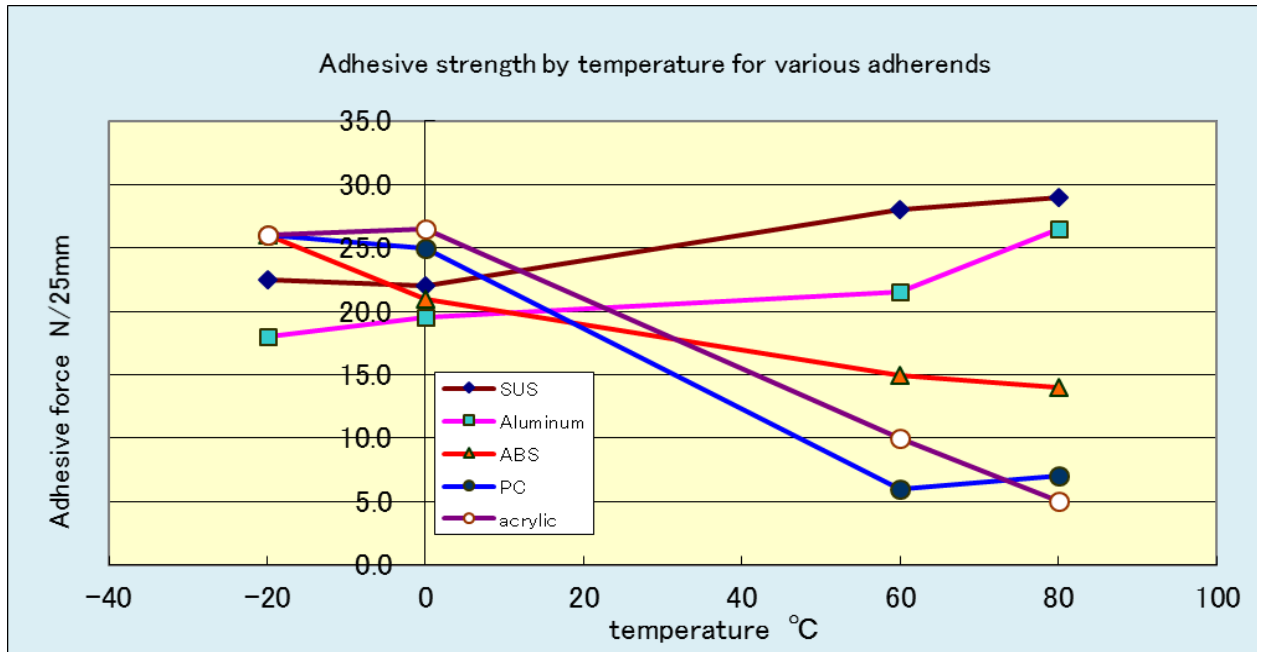

*PET#25backing Adherend : stainless

After pasting, leave for 24 hours

Tensile speed 300mm/min 180 degree peel

2. how to use

- 1) Remove contamination and moisture such as dust and oil on the material surface to be laminated.
- 2) Unravel the tape and paste it on the adherend with acupressure.
- 3) After sufficiently crimping with a roll etc., peel off the separator.
- 4) By laminating the adherends to be bonded together and crimping uniformly, strong bond strength can be obtained.

3. quantity

Item name	size(mm)	quantity/box
HB pink	50x20	30R

Precautions on use

- All technical data are prepared based on tests and measured values conducted at the laboratory of Joint Giken Kagaku Co., Ltd.
However, product characteristics may vary greatly depending on environment and adherend.
Therefore, regarding these characteristic data, it is a reference value, not a guaranteed value.
Before using it please make sure that this product is suitable for the intended use and environment.
- The above measurement is data at room temperature (23 ° C). In case of low temperature (5 ° C or less), adhesion may decrease sharply.

Caution on storage

- Please be sure to put it in a box and keep it.
 - Please choose a cold and dark place not to be exposed to direct sunlight for the storage location.
- In particular, please do not expose to high temperature and high humidity (temperature 30 ° C or more and humidity 50% or more forbidden).

phone +81-4-2944-5151



