

Cleaning tape
900 series


Feature

- Catch everything
- Easy cut by your hand

Application

cleaning of electronics parts or optical parts

Structure

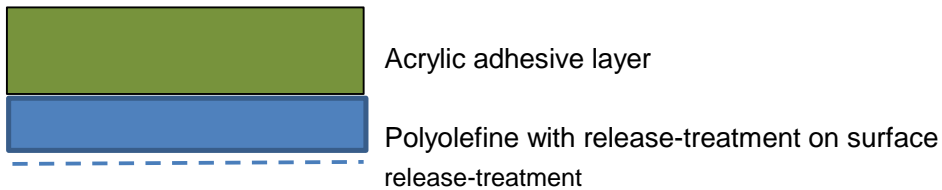

Properties

Specification

Base material	Olefine polymer		
Color	White		
Thickness	0.1 mm		
Size	Width	150 - 1300	mm
	Length	15 - 30	m

general properties

Item	Adhesive Force N/inch
900Z	under 1
900A	under 2
900B	2 - 5
900C	5 - 8
900ZE	under 1
900UE	under 1

※Measure method
Adhesive force

Adhesive force JIS Z0237
PET#25 backing, peeling speed 300mm/min, 180° angle.

Precautions on use

All technical data are prepared based on the tests and measured values carried out in the laboratory of KGK Chemical Corp. as the standard.

However, product characteristics may vary greatly depending on environment and adherend.

Therefore, regarding these characteristic data, it is a reference value, not a guaranteed value.

Before using it please make sure that this product is suitable for the intended use and environment.

Caution on storage

Please be sure to put it in a box and keep it.

Please choose a cold and dark place not to be exposed to direct sunlight for the storage location.

In particular, please do not expose to high temperature and high humidity

(temperature 30 °C or more and humidity 50% or more forbidden). 940 Minaminagai Tokorozawa-City saitama-Pref

The warranty period of the tape is unopened and it is six months after shipment.

KGK Chemical Corp.

359-0011 Japan

Tel : +81 4 2944 5151

Mail : postbox@kgk-tape.co.jp

URL : <http://www.kgk-tape.co.jp/>