

Cut Fiber Tape


Feature

It is flexible and has no elongation, it can be handled straight.

Application

Waterproof airtight, paint masking, curing, for binding

Structure

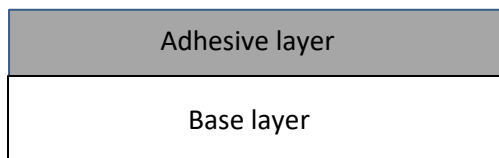


Properties

It is a multifunctional film hand-cut tape made of mechanical pseudo-braid which does not weave, mechanically imparted to the tape layer the tensile strength and hand-cut of the warp and weft, which are features of the fabric.

Soft and very little elongation. The elongation percentage is 20%

Item	Adhesive Force (N/inch)	Thickness (mm)	Usages
Cut fiber tape 10	7	0.11	Floor
Cut fiber tape 20	9	0.11	Wall
Cut fiber tape 30	11	0.11	Fixation Band

There is no fray of the thread.

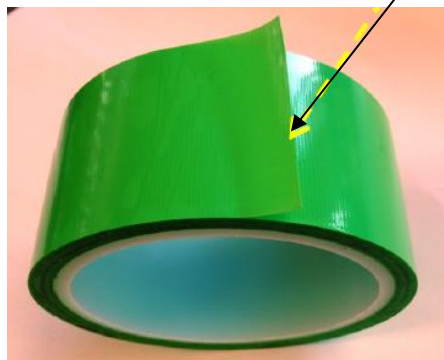

Precautions on use

All technical data are prepared based on the tests and measured values carried out in the laboratory of KGK Chemical Corp. as the standard.

However, product characteristics may vary greatly depending on environment and adherend.

Therefore, regarding these characteristic data, it is a reference value, not a guaranteed value.

Before using it please make sure that this product is suitable for the intended use and environment.

Caution on storage

Please be sure to put it in a box and keep it.

Please choose a cold and dark place not to be exposed to direct sunlight for the storage location.

In particular, please do not expose to high temperature and high humidity

(temperature 30 °C or more and humidity 50% or more forbidden).

The warranty period of the tape is unopened and it is six months after shipment.

Published in 19-Dec-2018

KGK Chemical Corp.
940 Minaminagai Tokorozawa-City saitama-Pref
359-0011 Japan
Tel : +81 4 2944 5151
Mail : postbox@kgk-tape.co.jp
URL : <http://www.kgk-tape.co.jp/>