

## Mechanical Fiber Tape


### Feature

It is a tape with strong adhesion even if it is thin.

### Application

For fixing of electronic parts, etc.

### Structure

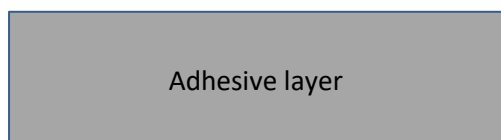

Acrylic adhesive layer containing fiber.



### Properties

Item	Adhesive Force (N/inch)	Holding power (mm)	Thickness (mm)
Mechanical Tape	24	0.5	0.08

※Measurement conditions:

Adhesive force	PET#25 backing, peeling speed 300mm/min, 180° angle.	
Holding power	Weight X hour	10 N X 6 hr

Unique component joining brings out new properties.

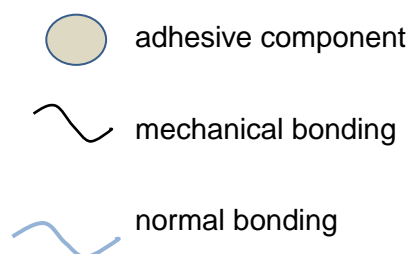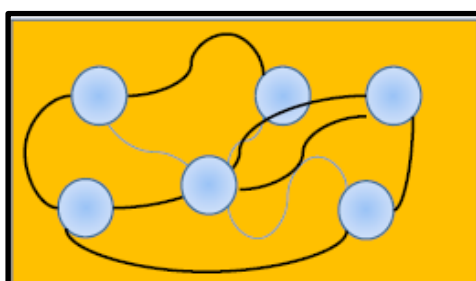

### Precautions on use

All technical data are prepared based on the tests and measured values carried out in the laboratory of KGK Chemical Corp. as the standard.

However, product characteristics may vary greatly depending on environment and adherend.

Therefore, regarding these characteristic data, it is a reference value, not a guaranteed value.  
Before using it please make sure that this product is suitable for the intended use and environment.

### **Caution on storage**

Please be sure to put it in a box and keep it.

Please choose a cold and dark place not to be exposed to direct sunlight for the storage location.

In particular, please do not expose to high temperature and high humidity

(temperature 30 °C or more and humidity 50% or more forbidden).

The warranty period of the tape is unopened and it is six months after shipment.

Published in 19-Dec-2018

KGK Chemical Corp.  
940 Minaminagai Tokorozawa-City saitama-Pref  
359-0011 Japan  
Tel : +81 4 2944 5151  
Mail : [postbox@kgk-tape.co.jp](mailto:postbox@kgk-tape.co.jp)  
URL : <http://www.kgk-tape.co.jp/>